


Key Features

- 5,200 ANSI Lumens offering bright images in any environment
- Up to a 300" ultra-large screen with a lower cost-per-inch
- Supports a 21:9 aspect ratio, ideal for Microsoft Teams Rooms
- Installation flexibility: V lens shift, 1.6x optical zoom, and H/V keystone correction
- 3rd generation laser phosphor technology with a lifespan up to 30,000 hours



Product Description

The LSC520WU is a lamp-free, high-brightness projector designed for commercial, educational, and public spaces. Utilising 3rd generation laser phosphor technology, this projector delivers 5,200 ANSI Lumens of brightness for up to 30,000 hours and can project an ultra-large screen up to 300" in WUXGA resolution. Ideal for modern workplaces, its 21:9 aspect ratio is optimised for Microsoft Teams Rooms applications, enhancing collaborative environments. Equipped with features like V lens shift, 1.6x optical zoom, H/V keystone correction, and 360° projection capabilities, the LSC520WU offers flexible setup possibilities. Additionally, its comprehensive LAN control ensures seamless integration into existing device management networks.

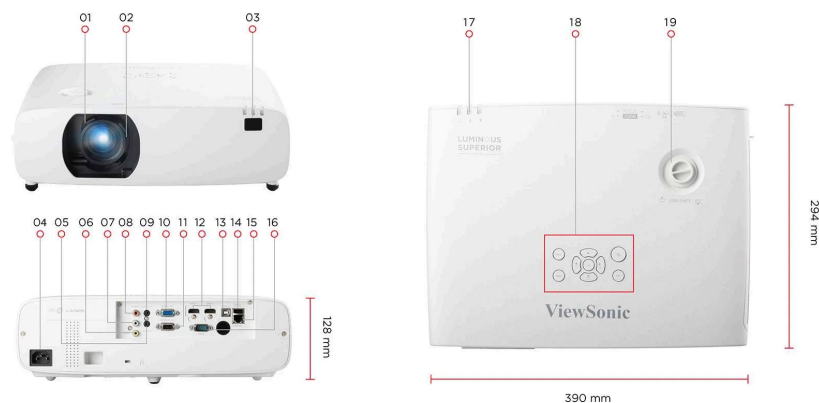

SPECIFICATION		OTHERS	
Native Resolution:	1920x1200	Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Brightness:	5200 (ANSI Lumens)	Power Consumption:	Normal: 230W Standby: <0.5W
Brightness (Center Lumens):	6000	Operating Temperature:	0~40°C
Contrast Ratio:	3000000:1	Carton:	Brown
Display Color:	1.07 Billion Colors	Net Weight:	5.2kg
Light Source Type:	Laser Phosphor	Gross Weight:	7.23kg
Light Source Life (hours) with Normal Mode:	20000	Dimensions (WxDxH) with Adjustment Foot:	390x294x128mm
Light Source Life (hours) with SuperEco Mode:	30000 (Eco)	Packing Dimensions:	492x443x239mm
Lens:	F=1.58-2.02, f=15.3-24.6mm	OSD Language:	English, German, French, Italian, Spanish, Polish, Swedish, Dutch ,Portugese, Japanese, Simplified Chinese, Traditional Chinese, Korean, Russian,Turkish, Finnish, Norwegian, Danish, Indonesian, Hungarian, Czech, Kazak, Vietnamese,Thai, Farsi, total 25 languages
Projection Offset:	0%+/-5%		
Throw Ratio:	1.08-1.76		
Optical Zoom:	1.6X		
Digital Zoom:	1.0x-4.0x	User Guide Language:	English, S-Chinese, T-Chinese, Indonesian, Finish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Arabic, Czech, Thai, Vietnamese, total 20 languages
Image Size:	30"-300"		
Throw Distance:	0.70-11.37m (100"@2.33m)		
Keystone:	H: +/-30° , V: +/-30°		
Lens Shift V. Range:	+45%, 0%	STANDARD ACCESSORY	
Audible Noise (Normal):	35dB	Power Cord:	1
Audible Noise (Eco):	26dB	Remote Control:	1
Input Lag:	60ms	QSG:	Yes
Resolution Support:	VGA(640 x 480) to 4K(3840 x 2160@30Hz)	Air Filter:	Yes
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160p@30Hz	Warranty Card:	Yes (CN Only)
Horizontal Frequency:	15K-100KHz	OPTIONAL ACCESSORY	
Vertical Scan Rate:	23-85Hz	Air Filter:	Yes
INPUT		Wall/Ceiling Mount:	PJ-WMK-007
Computer in (share with component):	1		
Composite:	1		
HDMI:	2 (HDMI 1.4/ HDCP 1.4)		
Audio-in (3.5mm):	1		
Audio-in (RCA R/L):	1		
USB Type A:	1 (5V/1.5A)		
OUTPUT			
Monitor out:	1		
Audio-out (3.5mm):	1		
Speaker:	16W		
USB Type A (Power):	1 (USB2.0 - 5V/1.5A, share with USB A Input)		
CONTROL			
RS232 (DB 9-pin male):	1		
RJ45 (LAN control):	1		
USB Type B (Services):	1		