


## Key Features

- 1.3X optical zoom
- SuperColor™ technology
- Energy-efficient SmartEco+ Mode
- Vertical Lens Shift
- vColorTuner



## Product Description

The ViewSonic PX703HD is a practical Home Cinema Projector, featuring 3500 ANSI lumens, 1080p Full HD resolution, and ViewSonic's exclusive SuperColor™ technology, which together produce the finest of details and stunning colour in any medium sized space. The projector comes with an energy-saving SuperEco+ mode that reduces power consumption and extends lamp life to up to 20,000 hours, reducing the frequency of lamp replacement and lowering maintenance costs. Digital lens shift and H/V keystone help users easily set up the projector at any angle. Dual HDMI input and USB power supply further increase the flexibility of the user's entertainment experience.

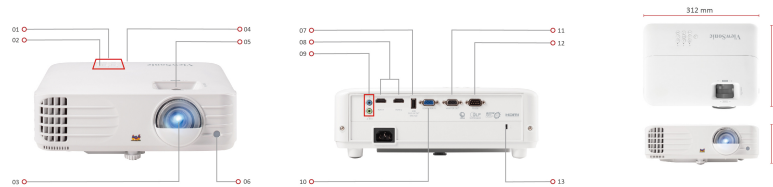

- |                  |                     |
|------------------|---------------------|
| 1. Keypad        | 8. HDMI Port        |
| 2. LED Indicator | 9. Audio In/Out     |
| 3. Lens          | 10. Computer In     |
| 4. Power Key     | 11. Computer Out    |
| 5. Zoom/Focus    | 12. RS-232          |
| 6. Front IR      | 13. Kensington Lock |
| 7. USB Type A    |                     |

**SPECIFICATION**

Projection System:	0.47" 1080p
Native Resolution:	1920x1080
DMD Type:	DC3
Brightness:	3500 ANSI Lumens
Contrast Ratio with SuperEco Mode:	12000:1
Display Colour:	1.07 Billion Colours
Light Source Type:	Lamp
Light Source Life (Normal):	5000
Light Source Life (SuperEco):	20000
Lamp Watt:	203W
Lens:	F=1.9-2.47, f=12-15.6mm
Projection Offset:	110% +/-6%
Throw Ratio:	1.13-1.47
Optical Zoom:	1.3x
Digital Zoom:	0.8x-2.0x
Image Size:	30"-300"
Throw Distance:	0.75m-9.76m (100"@2.5m)
Keystone:	+/- 40° (V)
Lens Shift V. Range:	Yes (+/- 5%)
Audible Noise (Normal):	31dB
Audible Noise (Eco):	27dB
Input Lag:	16ms
Resolution Support:	VGA(640 x 480) to WUXGA_RB(1920 x 1200) *RB-Reduced Blanking
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K-102KHz
Vertical Scan Rate:	23-120Hz

**INPUT**

Computer in (share with component):	1
HDMI:	2 (HDMI 1.4/ HDCP 1.4)
Audio-in (3.5mm):	1

**OUTPUT**

Monitor out:	1
Audio out (3.5mm):	1
Speaker:	10W
USB Type A (Power):	1 (5V/ 1.5A)

**CONTROL**

RS232 (DB 9-pin male):	1
------------------------	---

**OTHERS**

Power Supply Voltage:	100-240V +/- 10%, 50/60Hz (AC in)
Power Consumption:	Normal: 300W Standby: <0.5W
Operating Temperature:	0~40°C
Net Weight:	2.62kg
Dimensions (WxDxH) with Adjustment Foot:	312x222x108mm
OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, Total 23 languages

**STANDARD ACCESSORY**

Power Cord:	1
VGA Cable:	1
Remote Control:	1
QSG:	1

**OPTIONAL ACCESSORY**

Lamp/Light Source:	RLC-123
--------------------	---------